
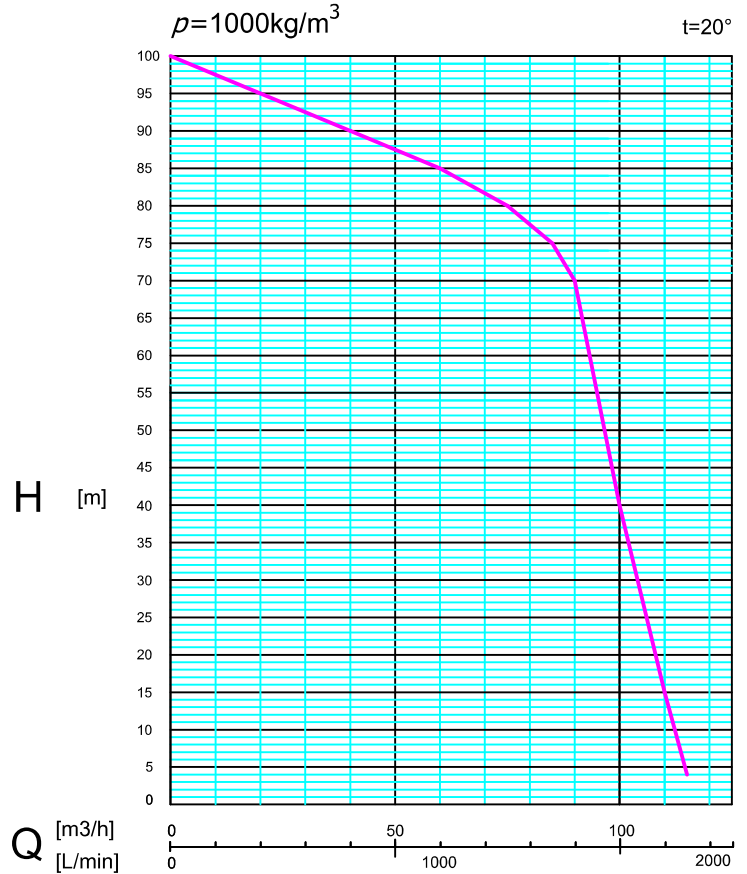



PUMP CHARACTERISTICS

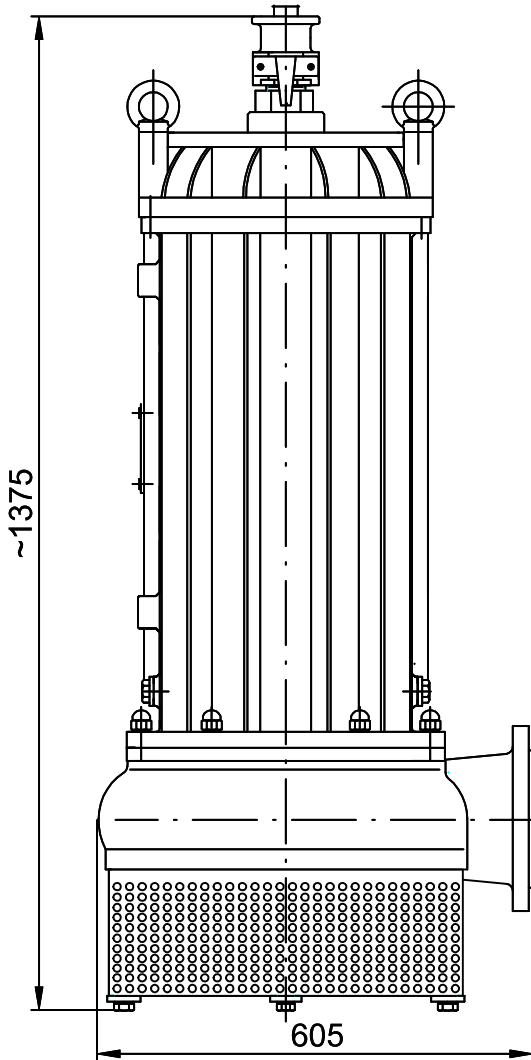

* voltage version:
 A - voltage 500V
 B - voltage 1000V
 C - voltage 500/1000V
 switchable engine

Pump is certified ATEX, number: OBAC 11 ATEX 662X

PARAMETERS OF THE PUMP

Efficiency	[m³/h]	0-115
Lift height	[m]	100-4
Power (nominal)	[kW]	37
Voltage	[V]	500/1000
Nominal power consumption	[A]	51/26
Rotational speed	[obr./min]	2940
Weight	[kg]	560
Maximal submergence level	[m]	20
Protection degree		IP 68
Explosion proof marking		 IM2c Exd I Mb
Max impurity	[mm]	12